



CALIFORNIA DYNAMICS CORPORATION
 5572 ALHAMBRA AVE.
 LOS ANGELES, CA. 90032-3106

CALL US – TO SET THINGS RIGHT

FAX (323) 223 – 7941

PH (323) 223 – 3882

email: caldyn@earthlink.net

TYPE FP

1" SANDWICH PAD
 RIBBED NEOPRENE
 AND CORK

FILE 260

06/06/01

JOB: _____

CUST: _____

ENG'R: _____

TAG: _____

DATE: _____

ALL SPEEDS

FP – Pad prevents equipment rocking by compensating for mismatch of 4 rigid support points to typical wavy floor surface:
 EQUIPMENT w/4 rigid support points
 COMPRESSOR (TANK MOUNTED)

TO MINIMIZE DISTURBANCES FROM ENTERING THE FLOOR.

**HIGH SPEED
 1500 CPM AND UP**

FP – Pad eliminates noise and reduces vibration transmitted from :
 ENGINES
 TRANSFORMERS
 PUMPS and PIPING
 STEAM GENERATORS
 CRUSHERS


**LOW SPEED
 0 TO 250 CPM**

FP – Pad limits impact shock transmission and simplifies installation of:
 PUNCH PRESSES
 SHEARS
 VACUUM PUMPS
 HAMMERS

**LOW SPEED AND
 HIGH SPEED
 0 TO 250 CPM AND
 1500 CPM AND UP**

TO MINIMIZE TRANSMISSION OF DISTURBANCES FROM THE FLOOR.

FP – Pad protects these sensitive instruments, machines and devices from low frequency shocks and high frequency vibrations present in the floor.
 GRINDERS
 SURFACE PLATES
 MACHINE TOOLS
 INSTRUMENTS

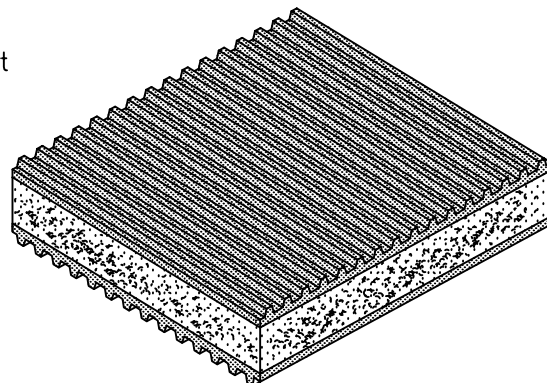

LOAD CAPACITY

Load Capacity to 60 Lbs./Sq.inch

THICKNESS

Standard Thickness – 1", others available

NON – SKID

Thread Surfaces Resist "Walking"

DURABLE

Cork and Neoprene are oil and ozone Resistant.

MAXIMUM PAD SIZE 36" x 36"				FACTORY CUT SIZES LISTED			
STANDARD CAPACITY							
SIZE (Inches)	Max.Load Selection At 40 P.S.I.	SIZE (Inches)	Max.Load Selection At 40 P.S.I.	SIZE (Inches)	Max.Load Selection At 40 P.S.I.	SIZE (Inches)	Max.Load Selection At 40 P.S.I.
2 x 2	160	3 x 9	1080	4 x 18	2880	12 x 18	8640
2 x 3	240	6 x 6	1440	9 x 9	2880	18 x 18	12960
2 x 4	320	4 x 9	1440	9 x 12	4320	12 x 36	17280
3 x 3	360	3 x 12	1440	6 x 18	4320	18 x 24	17280
2 x 6	480	2 x 18	1440	3 x 36	4320	24 x 24	23040
4 x 4	640	4 x 12	1920	12 x 12	5760	18 x 36	25920
3 x 6	720	3 x 18	2160	4 x 36	5760	24 x 36	35560
4 x 6	960	2 x 36	2880	9 x 18	6480	36 x 36	51840
2 x 12	960	6 x 12	2880	6 x 36	6480		