



CALIFORNIA DYNAMICS CORPORATION
 5572 ALHAMBRA AVE.
 LOS ANGELES, CA. 90032-3106

CALL US - TO SET THINGS RIGHT

FAX (323) 223 - 7941

PH (323) 223 - 3882

email: caldyn@earthlink.net

TYPE KH30
 15° TILT
 1" SPRING HANGER
 w/NEOPRENE GROMMET

FILE 386

8/30/05

JOB: _____

CUST: _____

ENG'R: _____


TAG: _____

DATE: _____

Type KH30 is used where uncertain alignment is anticipated during installation.
 At normal load, the hanger rod will operate to a full 15° Tilt in any direction from vertical centerline.

Isolator Selection & Loc.

HANGER NO. Max. Load (lbs)	RATED DEFL.	DIMENSIONS (Inches)			
		W	L	S	MRD
ET 42	1	3-5/8	2-1/2	4-3/4	3/8
ET 80	1				
ET 129	1				
ET 194	1	4-1/2	3-3/4	6	1/2
ET 255	1				
ET 347	1				
ET 473	1	4-1/2	3-3/4	6	5/8
ET 667	1				3/4

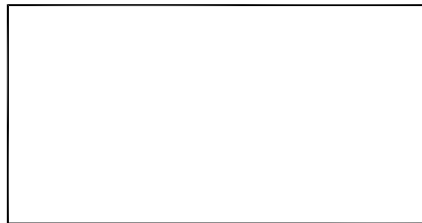

TYPICAL CALLOUT : KH30 - ET 129
 Type - (Hanger No.)

